

T Series



TRIAC Dimming LED Driver

可控硅调光LED驱动器

Features:

- Dimmable with trailing edge dimmer
- Constant current driver
- Independent compact design
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II
- Dimming range 1...100%

- 适用普通可控硅后切相调光器
- 恒流驱动
- 超小体积，独立式紧凑型设计
- 螺丝锁紧大接线端子，方便多规格线接驳
- 输出开路，短路，过载和超温保护
- 安装经济便捷
- 符合安全特低电压标准
- 保护等级 II
- 调光范围 1...100%光通量

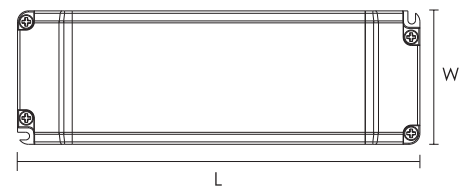

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
DIM500mA/30W	220-240	30	500	30-56	0.90C	83	-20...+40	80	SELV	166x52x24	200
DIM700mA/36W	220-240	36	700	24-52	0.90C	82	-20...+40	80	SELV	166x52x24	200
DIM1050mA/36W	220-240	36	1050	16-35	0.90C	80	-20...+40	80	SELV	166x52x24	200
DIM1400mA/36W	220-240	36	1400	9-26	0.90C	80	-20...+40	80	SELV	166x52x24	200