

Q7H Series


Constant Current LED Driver

LED恒流驱动器

Features:

- Extra small compact housing
- Driver for built-in use
- Push wire connections
- Suitable for protection class I and II luminaires
- High power factor
- high efficiency
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV class II output

- 超小体积紧凑设计
- 内置式驱动
- 按压式接线端子
- 适用I类和II类灯具
- 高功率因数设计
- 高效率, 温升低
- 输出开路, 短路, 过载和超温保护
- SELV和II类等级

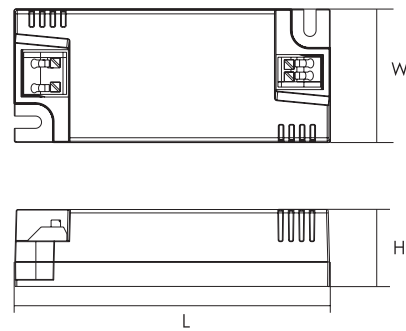

Parameters:

Model No.	Input voltage	Max. output	Output current	Output voltage	Power factor	THD	Efficiency full load	No-load power	Ambient temperature	Max. casing temperature	Isolation	Dimensions LxWxH	Weight
型号	额定电压 (V)	功率 (W)	输出电流 (mA)	输出电压 (V)	功率因数 (λ)	总谐波 (%)	效率 (%)	空载功率 (W)	环境温度 ta (°C)	最大外壳温度 tc (°C)	隔离	尺寸 (mm)	重量 (g)
Q7H-260mA-12W	220-240	12	260	15-46	0.95	<20	83	<0.5	-20...+50	80	SELV	90x38x22	50
Q7H-350mA-12W	220-240	12	350	12-35	0.95	<20	83	<0.5	-20...+50	80	SELV	90x38x22	50
Q7H-500mA-12W	220-240	12	500	8-24	0.95	<20	82	<0.5	-20...+50	80	SELV	90x38x22	50
Q7H-700mA-12W	220-240	12	700	6-17	0.95	<20	82	<0.5	-20...+50	80	SELV	90x38x22	50
Q7H-350mA-15W	220-240	15	350	14-43	0.95	<20	85	<0.5	-20...+50	80	SELV	90x38x22	50
Q7H-350mA-20W	220-240	20	350	19-57	0.95	<15	88	<0.5	-20...+50	80	SELV	100x43x28	85
Q7H-500mA-20W	220-240	20	500	14-40	0.95	<15	87	<0.5	-20...+50	80	SELV	100x43x28	85
Q7H-700mA-20W	220-240	20	700	10-29	0.95	<15	86	<0.5	-20...+50	80	SELV	100x43x28	85
Q7H-600mA-25W	220-240	25	600	14-42	0.95	<15	87	<0.5	-20...+50	80	SELV	100x43x28	85